

- GENERAL TOPOGRAPHY NOTES
- 1 NORTH REFERENCE IS ALABAMA STATE COORDINATE SYSTEM GRID BEARING - EAST ZONE [NAD83] AND USING A VERTICAL DATUM OF NAVD 88 AS SHOWN HEREON.
 - 2 ALL MEASUREMENTS SHOWN ARE TO U.S. STANDARDS AND ARE FIELD MEASUREMENTS UNLESS OTHERWISE SHOWN.
 - 3 UTILITY LOCATOR SERVICE: CONTRACTOR SHALL NOTIFY ALABAMA ONE CALL FOR UTILITY LOCATIONS PRIOR TO START OF WORK. CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING ALL EXISTING UTILITIES THROUGHOUT CONSTRUCTION AND SHALL BE SOLELY RESPONSIBLE FOR REPAIRING ANY DAMAGE DUE TO CONSTRUCTION ACTIVITIES.
 - 4 FIELD WORK COMPLETED IN MAY, 2020.
 - 5 SITE BENCHMARK: MAG NAIL IN ASPHALT
N: 1505928.81
E: 336375.38
ELEV: 568.59

**PUGH WRIGHT
MCANALLY**
CIVIL ENGINEERS

310 8th Avenue NE - PO BOX 2419 - Decatur, AL - (256) 353-8837
www.pughwrightmcanally.com

REVISIONS	Rev#	Description	Date
5			
4			
3			
2			
1			

HOLLINGSWORTH COMPANIES
LOT 10, SOUTHPOINT INDUSTRIAL PARK PHASE II
SECTION 1, TOWNSHIP 5 SOUTH, RANGE 4 WEST
LIMESTONE COUNTY, ALABAMA
TOPOGRAPHIC SURVEY

Date: 05/01/2020
Drawn By: RWH
Approved By: RWH
Scale: 1"=60'

Sign/Seal


Job Number:
551-20

Sheet Number:
1 OF 1

- LEGEND**
- CIPF CAPPED IRON PIN FOUND
 - MN-W MAG NAIL AND WASHER
 - ROW RIGHT-OF-WAY
 - CONC CONCRETE
 - LP LIGHT POLE
 - XFMR TRANSFORMER
 - EM ELECTRIC METER
 - UGE UNDERGROUND ELECTRIC
 - P/P POWER POLE
 - GUY GUY WIRE
 - WV WATER VALVE
 - PIV POST INDICATOR VALVE
 - FDC FIRE DEPARTMENT CONNECTION
 - FH FIRE HYDRANT
 - WM WATER METER
 - GM GAS METER
 - SSMH SANITARY SEWER MANHOLE
 - SSCO SANITARY SEWER CLEAN-OUT
 - HDPE HIGH-DENSITY POLYETHYLENE PIPE
 - RCP REINFORCED CONCRETE PIPE
 - STM-MH STORM MANHOLE
 - HDWL HEADWALL
 - SIWC SINGLE-WING CURB INLET
 - DWCI DOUBLE-WING CURB INLET

CURVE	RADIUS	ARC LENGTH	CHORD BEARING (P)	CHORD BEARING (M)	CHORD LENGTH
C1	60.00'	74.66'	S 40°37'27" E	S 39°40'18" E	89.94'
C2	100.00'	162.24'	S 58°26'58" E	S 57°29'27" E	161.24'
C3	1924.93'	1436.92'	S 77°05'03" E	S 76°07'54" E	1432.77'
C4	187.50'	175.65'	S 78°47'10" E	S 77°50'00" E	173.32'

LINE	BEARING (P)	BEARING (M)	DISTANCE
L1	N 13°33'17" W	N 12°38'08" W	54.00'
L2	N 40°36'49" W	S 39°39'41" E	28.73'
L3	N 76°26'43" E	N 77°23'52" E	174.85'

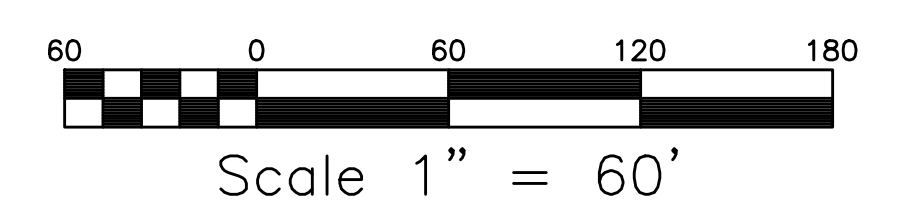

VICINITY MAP